


## DATA SHEET

## BDP-20-BA

### ■ BDP-20BA □ · 20BS □

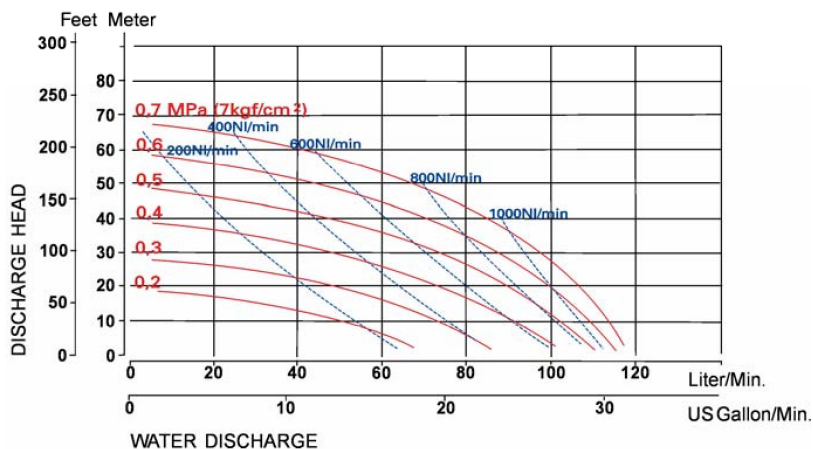

TECHNICAL DATA			Pump type BDP-20-BA/BS		
Air supply pressure	0,2-0,7	MPa	Max. viscosity (neg. suc.)	5.000	Cp
Discharge volume/cycle	350	Cc	Max. viscosity (pos..suc.)	10.000	Cp
Max. discharge volume	110	L/min	Max. air consumption	1200	NL/min
Max. discharge pressure	0,7	Mpa	Operating noise level	97	dB(a)
Max. size of solids	2	mm	Operating temp. ambient	70	°C
Max. suction lift dry	T	- m	Operating temp. fluid	NBR/CR	70 °C
Max. suction lift wet	T	- m		TPEE/EPDM	80 °C
Max. suction lift dry	R	2,9 m		FPM/TPO/PTFE	100 °C
Max. suction lift wet	R	9,1 m			
Max. lq inlet pressure	T	- Mpa	Weight	type A [BDP]	9,0[11,2] Kg
Max. lq inlet pressure	R	0,1 Mpa	Weight	type S [BDP]	14,0[16,0] Kg
Caution! Data based on water (1 Cp)					

